
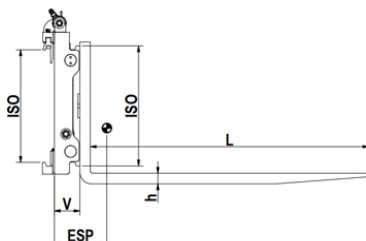


Positionneur de fourches rapporté version à fourches  
boulonnées, double barre pin type et déplacement latéral  
constant



Type	Capacité maxi / CDG	Accrochage ISO	Course DL	Largeur corps B	Ouverture ext./ ext. fourches A	Fourches* l x b x h	CDG	Déport avec fourches	Poids
	kg/mm		mm						
ZVW 16-GS	1600 / 500	2	+/- 75	850	300-730	100x 40x1200	222	164	273
			+/- 100	980	300-860		216		283
				1040	300-920		212		285
ZVW 20-GS	2000 / 500	2	+/- 75	850	300-730	100x 45x1200	234	169	285
			+/- 100	980	300-860		232		290
				1040	300-920		227		298
				1150	300-1030		221		309
ZVW 25-GS	2500 / 500	2	+/- 100	980	320-880	120x 40x1200	243	164	305
				1040	320-940		238		308
				1150	320-1050		231		319
				1200	320-1100		228		325
				1350	320-1250		219		341
ZVW 28-GS	2500 / 600	2	+/- 100	1040	325-945	125x 45x1200	256	169	328
				1150	325-1055		249		339
				1200	325-1105		245		345
				1350	325-1255		236		361
ZVW 30-GS	3000 / 500	3	+/- 100	1040	325-945	125x 45x1200	248	172	352
				1150	325-1055		241		363
				1200	325-1105		238		370
				1300	325-1205		234		380
				1350	325-1255		228		388

Positionneur de fourches rapporté version à fourches  
boulonnées, double barre pin type et déplacement latéral  
constant

## ZVW GS

Type	Capacité maxi/CDG	Accrochage ISO	Course DL	Largeur corps B	Ouverture ext./ ext. fourches A	Fourches* l x b x h	CDG	Déport avec fourches	Poids
	kg/mm								
ZVW 35-GS	3500 /500	3	+/- 100	1150	340-1070	50x1200	265	177	398
				1200	340-1120		262		405
				1300	340-1220		255		418
				1350	340-1270		252		424
ZVW 40-GS	4000 /600	3	+/- 100	1150	370-1050	50x1200	249	200	471
				1200	370-1100		248		479
				1250	370-1150		248		487
				1350	370-1250		247		504
				1450	370-1350		245		520
				1550	370-1450		243		537
ZVW 45-GS	5000 /600	3	+/- 100	1150	380-1060	60x1200	274	210	532
				1250	380-1160		268		550
				1350	380-1260		261		566
				1450	380-1360		255		583
				1550	380-1460		249		600
				1750	380-1660		240		632
ZVW 50-GS	5000 /600	4	+/- 100	1350	380-1260	60x1200	227	226	693
				1450	380-1360		225		711
				1550	380-1460		220		729
ZVW 55-GS	5000 /600	4	+/- 100	1250	340-1070	70x1200	231	177	685
				1350	340-1120		229		703
				1450	340-1220		227		721
				1550	340-1270		222		739
ZVW 60-GS	6000 /600	4	+/- 100	1460	380-1340	70x1200	215	236	845
			+/- 160	1660	380-1540		210		880
				1860	380-1740		205		915
ZVW 70-GS	7000 /600	4	+/- 100	1460	380-1340	70x1200	215	263	933
				1660	380-1540		210		1000
			+/- 160	1860	380-1740		201		1061
				2060	380-1940		195		1110

1.12

Positionneur de fourches rapporté version à fourches  
boulonnées, double barre pin type et déplacement latéral  
constant

Type	Capacité maxi / CDG	Accrochage ISO	Course DL	Largeur corps B	Ouverture ext./ ext. fourches A	Fourches* l x b x h	CDG	Déport avec fourches	Poids
	kg/mm		mm						
ZVW 80-GS	8000 /600	4	+/- 160	1460	480-1340	200x 70x1200	260	263	1090
				1800	480-1680		243		1187
				1860	480-1740		240		1204
				2060	480-1940		231		1267
				2160	480-2040		228		1291
				2260	480-2140		225		1315
				2400	480-2280		222		1350
ZVW 100-GS	8000 /900	4	+/- 160	1800	480 - 1680	200x 80x1200	245	290	1480
				1860	480 - 1740		244		1495
				2060	480-1940		240		1555
				2160	480-2040		238		1585
				2260	480-2140		235		1615
				2400	480-2280		230		1670
ZVW 110-GS	8000 /1100	4	+/- 160	2060	480-1940	200x 80x1200	242	313	1635
				2260	480-2140		236		1700
				2400	480-2280		232		1750

1.12

### A savoir :

- Guidage double barre "pin-type"
- Avec fourches boulonnées
- Nécessite 2 fonctions hydrauliques

### En option sur demande :

- dossieret d'appui de charge
- sans déplacement latéral