


Positionneur de fourches rapporté version à platines, double barre pin type et déplacement latéral constant

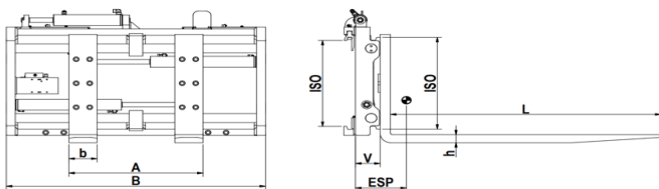

Type	Capacité maxi / CDG	Accrochage ISO	Course DL	Largeur corps B	Ouverture ext./ ext. fourches A	largeur platines	CDG	Déport V	Poids
	kg/mm								
ZVW 20-S	2000 / 500	2	+/- 100	980	320-880	120	53	124	181
				1040	320-940		53		191
				1150	320-1050		52		203
ZVW 25-S	2500 / 500	2	+/- 100	980	320-880	120	53	124	185
				1040	320-940		52		192
				1150	320-1050		52		204
				1200	320-1100		52		210
				1350	320-1250		51		225
ZVW 28-S	2500 / 600	2	+/- 100	1040	320-940	120	52	124	192
				1150	320-1050		52		204
				1200	320-1100		52		210
				1350	320-1250		51		225
ZVW 30-S	3000 / 500	3	+/- 100	1040	320-940	120	54	127	208
				1150	320-1050		54		219
				1200	320-1100		54		225
				1300	320-1200		54		238
ZVW 35-S	3500 / 500	3	+/- 100	1350	320-1250	120	54	127	244
				1150	340-1050		55		222
				1200	340-1100		55		228
				1300	340-1200		54		239
ZVW 45-S	5000 / 600	3	+/- 100	1350	340-1250	140	54	150	244
				1150	370-1050		66		303
				1250	370-1150		66		320
				1350	370-1250		65		336
				1450	370-1350		65		353
				1550	370-1450		64		370
ZVW 50-S	5000 / 600	4	+/- 100	1750	370-1650	140	64	156	402
				1250	370-1150		61		419
				1350	370-1250		61		437
				1450	370-1350		61		455
				1550	370-1450		61		473

1.10

Positionneur de fourches rapporté version à platines, double barre pin type et déplacement latéral constant

## ZVW S

Type	Capacité maxi / CDG	Accrochage ISO	Course DL	Largeur corps B	Ouverture ext./ ext. fourches A	largeur platines	CDG	Déport V	Poids
	kg/mm		mm						
ZVW 55-S	5000 / 600	4	+/- 100	1250	370-1150	140	63	156	429
				1350	370-1250		63		447
				1450	370-1350		63		465
				1550	370-1450		63		483
ZVW 60-S	6000 / 600	4	+/- 100	1460	380-1340	150	65	166	560
			+/- 160	1660	380-1540		65		595
				1860	380-1740		65		630
ZVW 70-S	7000 / 600	4	+/- 100	1460	380-1320	150	79	193	682
				1660	380-1540		79		730
			+/- 160	1860	380-1740		79		776
				2060	380-1940		79		822
ZVW 80-S	8000 / 600	4	+/- 160	1460	480-1340	200	83	193	685
				1800	480-1680		82		785
				1860	480-1740		82		802
				2060	480-1940		81		866
				2160	480-2040		81		890
				2260	480-2140		81		915
				2400	480-2280		81		950
ZVW 100-S	8000 / 900	4	+/- 160	1800	480-1680	200	95	210	1010
				1860	480-1740		95		1030
				2060	480-1940		95		1090
				2160	480-2040		95		1120
				2260	480-2140		95		1150
				2400	480-2280		93		1198
ZVW 110-S	8000 / 1100	4	+/- 160	2060	480-1940	200	100	233	1165
				2260	480-2140		101		1230
				2400	480-2280		101		1280

1.10

### A savoir :

- Guidage double barre "pin-type"
- Nécessite 2 fonctions hydrauliques
- Pour fourches ISO ou boulonnées

### En option sur demande :

- sans déplacement latéral
- dossieret d'appui de charge